

DEESTONE



OFF THE ROAD

2013-2014



• AGRICULTURAL • FRONT FARM • REAR FARM • INDUSTRIAL TRACTOR • IMPLEMENT • TRACTOR • GO KART • GOLF CART

• WHEEL BARROW • SKID STEER • INDUSTRIAL IMPLEMENT • LAWN & GARDEN • ATV • FORKLIFT • DUMPER • EARTH MOVING

Always being as your partner along the road

Message of Executive




Thailand is one of the huge rubber-tree producing countries with the world-best quality. The industry of readymade tyres for exporting is the significant means of gaining the nation enormous revenue.

Deestone Limited was initiated on the basis of being an alternative for domestic market while at the time the market was mainly shared by multi-national companies. Since then we still move forward with our commitment to providing world-class quality tyres and tubes with reasonable prices and international standard & technology compliance.

Comparing to other industries, the readymade tyre industry cause a few environmental effects. Tyre residues can be recycled and turns to other related products. With our concerns to environment,

DEESTONE Group develop our production and achieve ISO 9001:2000 from RWTU GERMANY to assure our quality of both products and production management process.

We are still moving forward, for more than 30 years, with the strong intention and unity support from our talented employees to producing World-best quality tyres and tubes and pushing Thai industries for international success achievement.

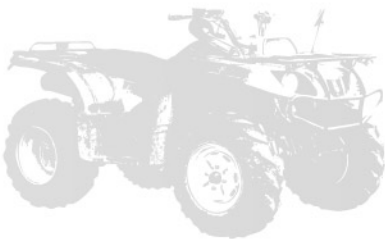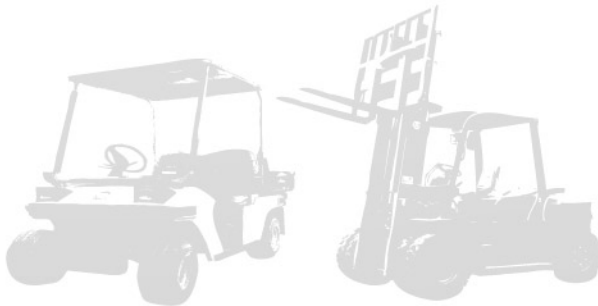



D401 (F-2)

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (kgs / lbs)	Rim Width (Inch)
				OD (mm)	SV (mm)					
3.50-6	2	19A6	T/T	355	103	7.2	20 / 140	78/171	30 / 19	3.00
	4	33A6	T/T	355	103	7.2	35 / 240	115/254	30 / 19	3.00
4.00-6	2	20A6	T/T	385	112	6.7	18 / 120	80/176	30 / 19	3.00
3.50-8	2	25A6	T/T	395	103	6.7	20 / 140	92.5/204	30 / 19	3.00
	4	37A6	T/T	395	103	6.7	35 / 240	128/280	30 / 19	3.00
4.00-8	2	30A6	T/T	435	112	6.7	17 / 120	106/234	30 / 19	3.00
	4	43A6	T/T	435	112	6.7	35 / 240	155/340	30 / 19	3.00
4.00-10	4	48A6	T/T	485	112	6.7	35 / 240	180/395	30 / 19	3.00
4.00-12	4	56A8	T/T	539	112	6.7	52 / 360	225/495	40 / 25	3.00
5.60-13	6	68A8	T/T	640	150	12.5	56 / 385	315/695	40 / 25	4.00
5.00-15	4	69A8	T/T	664	130	16.3	44 / 300	325/715	40 / 25	3.00
	6	75A8	T/T	664	130	16.3	56 / 385	387/855	40 / 25	3.00
5.50-16	6	82A8	T/T	713	150	14.4	56 / 385	475/1050	40 / 25	4.00
6.00-16	6	85A8	T/T	739	159	20.1	52 / 360	515/1140	40 / 25	4.00
6.50-16	6	88A8	T/T	761	173	20.1	48 / 330	560/1230	40 / 25	4.50
7.50-16	6	94A8	T/T	808	203	23.5	44 / 300	670/1480	40 / 25	5.50
	8	99A8	T/T	808	203	23.5	56 / 385	775/1710	40 / 25	5.50
9.00-16	10	116A8	T/T	855	234	24	56 / 390	1250/2755	40 / 25	6.00
10.00-16	8	110A8	T/T	894	274	27	44 / 300	1060/2340	40 / 25	8.00
	10	119A8	T/T	894	274	27	50 / 340	1360/3000	40 / 25	8.00
11.00-16	8	114A8	T/T	967	315	30.5	40 / 275	1180/2600	40 / 25	10.00
	10	122A8	T/T	967	315	30.5	45 / 310	1500/3305	40 / 25	10.00
7.50-18	8	102A8	T/T	859	203	19.2	56 / 385	850/1870	40 / 25	5.50
4.00-19	4	69A8	T/T	717	112	10.5	52 / 360	325/715	40 / 25	3.00
6.00-19	8	93A8	T/T	814	165	22	48 / 330	690/1520	40 / 25	4.50



LIGHT TRUCK



REAR FARM



D409



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (kgs / lbs)	Rim Width (Inch)
				oo (mm)	sw (mm)					
95-24	6	102A8	T/T	1048	241	38.4	30 / 210	850/1870	40 / 25	8.00
	8	108A8	T/T	1048	241	38.4	36 / 250	1000/2200	40 / 25	8.00



D312A

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (kgs / lbs)	Rim Width (Inch)
				oo (mm)	sw (mm)					
112-24	6	106A8	T/L	1103	284	33	28 / 180	950/2090	40 / 25	10.00
	8	113A8	T/T	1103	284	33	36 / 250	1150/2540	40 / 25	10.00
	8	113A8	T/L	1103	284	33	36 / 250	1150/2540	40 / 25	10.00

D312B



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (kgs / lbs)	Rim Width (Inch)
				oo (mm)	sw (mm)					
124-24	6	111A8	T/L	1159	315	44	24 / 165	1090/2400	40 / 25	11.00
	8	117A8	T/T	1159	315	44	32 / 220	1285/2830	40 / 25	11.00
	8	117A8	T/L	1159	315	44	32 / 220	1285/2830	40 / 25	11.00



D312C

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (kgs / lbs)	Rim Width (Inch)
				oo (mm)	sw (mm)					
149-24	6	119A8	T/L	1265	378	22.5	20 / 140	1360/3000	40 / 25	13.00
	8	124A8	T/L	1265	378	22.5	26 / 180	1600/3520	40 / 25	13.00





D312D

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (kgs / lbs)	Rim Width (Inch)
				OD (mm)	SW (mm)					
184-26	12	142A8	T/T	1450	467	38.4	32 / 220	2650/5840	40 / 25	16.00

D312E

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (kgs / lbs)	Rim Width (Inch)
				OD (mm)	SW (mm)					
184-30	8	135A8	T/T	1552	467	28.8	20 / 140	2180/4800	40 / 25	16.00
	12	145A8	T/T	1552	467	28.8	32 / 220	2900/6400	40 / 25	16.00



D317

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (kgs / lbs)	Rim Width (Inch)
				OD (mm)	SW (mm)					
124-24	8	117A8	T/T	1159	315	30.7	32 / 220	1285/2830	40 / 25	11.00

D321

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (kgs / lbs)	Rim Width (Inch)
				OD (mm)	SW (mm)					
112-24	6	106A8	T/T	1103	284	48.0	26 / 180	950/2090	40 / 25	10.00
	8	113A8	T/T	1103	284	48.0	36 / 250	1150/2540	40 / 25	10.00
124-24	6	111A8	T/T	1159	315	50.0	24 / 165	1090/2400	40 / 25	11.00
	8	117A8	T/T	1159	315	50.0	32 / 220	1285/2830	40 / 25	11.00
136-26	6	116A8	T/T	1260	345	50.0	22 / 150	1250/2760	40 / 25	12.00
	8	121A8	T/T	1260	345	50.0	28 / 190	1450/3200	40 / 25	12.00






D314 (R-4)

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed kgs / lbs	Rim Width (Inch)
				oo (mm)	sw (mm)					
16.9-24	10	145A8	T/L	1309	429	26	32 / 220	2900/6400	40 / 25	15.00
	12	149A8	T/L	1309	429	26	38 / 260	3250/7160	40 / 25	15.00
	14	152A8	T/L	1309	429	26	46 / 320	3550/7825	40 / 25	15.00
17.5L-24	12	148A8	T/L	1241	445	26	38 / 260	3150/6940	40 / 25	15.00
19.5L-24	12	151A8	T/L	1314	495	27.4	34 / 230	3450/7600	40 / 25	17.00
21L-24	12	155A8	T/L	1378	533	27.8	32 / 220	3875/8550	40 / 25	18.00
16.9-28	12	151A8	T/L	1410	429	26.9	38 / 260	3450/7600	40 / 25	15.00



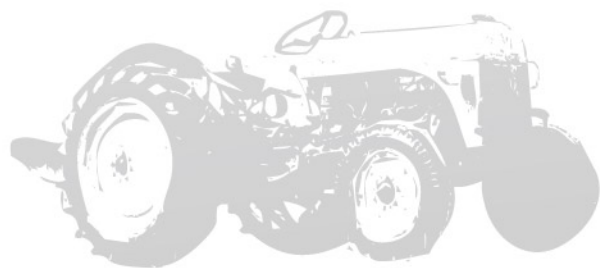

D315



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load Free Rolling (kgs / lbs)	Max. Load Drive wheel (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				OD (mm)	SW (mm)						
11.5/80-15.3	14	139/126A8	T/L	845	290	9.6	69 / 475	2430/5355	1700 / 3750	40/25	9.00
12.5/80-15.3	14	142/129A8	T/L	889	307	10.6	63 / 430	2650/5840	1850 / 4080	40/25	9.00



D411

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load Free Rolling (kgs / lbs)	Max. Load Drive wheel (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				OD (mm)	SW (mm)						
380/55-17	12	138/125A8	T/L	850	390	18.2	41 / 280	2360/5205	1650 / 3640	40/25	13.00

D308 (PG)



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load Free Rolling (kgs / lbs)	Max. Load Drive wheel (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				OD (mm)	SW (mm)						
16.5/85-24	12	162/150A8	T/T	1322	417	38.4	42 / 290	4750/10500	3350 / 7390	40/25	13.00
	12	162/150A8	T/L	1322	417	38.4	42 / 290	4750/10500	3350 / 7390	40/25	13.00
15.5/80-24	12	157/145A8	T/L	1240	394	38.4	44 / 300	4125/9090	2900 / 6395	40/25	13.00
	12	157/145A8	T/T	1240	394	38.4	44 / 300	4125/9090	2900 / 6395	40/25	13.00



D412

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load Free Rolling (kgs / lbs)	Max. Load Drive wheel (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				OD (mm)	SW (mm)						
11L-15	10	118B	T/L	777	279	12.5	44 / 300	1320/2910	-	50/30	8.00
	12	121B	T/L	777	279	12.5	52 / 360	1450/3200	-	50/30	8.00
11L-16	10	119B	T/L	803	279	12.5	44 / 300	1360/3000	-	50/30	8.00
	12	122B	T/L	803	279	12.5	52 / 360	1500/3300	-	50/30	8.00

I-1 Duramax



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load Free Rolling (kgs / lbs)	Max. Load Drive wheel (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				OD (mm)	SW (mm)						
9.5L-15	10	116B	T/L	767	241	7.0	52 / 360	1250/2760	-	50/30	7.00
11L-15	10	118B	T/L	777	279	7.0	44 / 300	1320/2910	-	50/30	8.00
12.5L-15	12	127B	T/L	823	318	7.0	52 / 360	1750/3860	-	50/30	10.00



TRACTOR



D402A

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed kgs / lbs	Rim Width (Inch)
				oo (mm)	sw (mm)					
3.50-5	2	16A6	T/T	330	103	10.6	20 / 140	71/157	30 / 20	3.00
	4	31A6	T/T	330	103	10.6	35 / 240	109/240	30 / 20	3.00
3.50-6	2	19A6	T/T	355	103	10.6	20 / 140	78/171	30 / 20	3.00
	4	33A6	T/T	355	103	10.6	35 / 240	115/254	30 / 20	3.00
4.00-8	2	30A6	T/T	435	112	11.5	18 / 120	106/234	30 / 20	3.00
	4	43A6	T/L	435	112	11.5	35 / 240	155/340	30 / 20	3.00
	4	43A6	T/T	435	112	11.5	35 / 240	155/340	30 / 20	3.00
4.00-10	4	48A6	T/T	485	112	11.5	35 / 240	180/395	30 / 20	3.00
	4	48A6	T/L	485	112	11.5	35 / 240	180/395	30 / 20	3.00



D402B

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed kgs / lbs	Rim Width (Inch)
				oo (mm)	sw (mm)					
6.00-14	6	81A8	T/T	674	167	14	52 / 360	462/1020	40 / 25	4.00
7.50-16	4	91A8	T/T	805	205	23	29 / 200	615/1355	40 / 25	5.50
7.50-16	8	103A8	T/T	805	205	23	54 / 370	875/1930	40 / 25	5.50

D405A

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed kgs / lbs	Rim Width (Inch)
				oo (mm)	sw (mm)					
3.50-5	2	16A6	T/T	330	103	8.7	20 / 140	71/157	30 / 20	3.00
	4	31A6	T/T	330	103	8.7	35 / 240	109/240	30 / 20	3.00
3.50-6	2	19A6	T/T	355	103	11	20 / 140	78/171	30 / 20	3.00
	4	33A6	T/T	355	103	11	35 / 240	115/254	30 / 20	3.00
3.50-7	2	22A6	T/T	370	103	11	20 / 140	85/187	30 / 20	3.00
	4	35A6	T/T	370	103	11	35 / 240	121/267	30 / 20	3.00
4.00-8	2	30A6	T/T	435	112	17	18 / 120	106/234	30 / 20	3.00
	4	43A6	T/T	435	112	17	35 / 240	155/340	30 / 20	3.00
4.00-9	4	46A6	T/T	460	112	17	35 / 240	170/375	30 / 20	3.00
4.00-10	4	48A6	T/T	485	112	16	35 / 240	180/395	30 / 20	3.00





D405B



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (kgs / lbs)	Rim Width (Inch)
				od (mm)	sw (mm)					
23x8.50-12 SEG	4	84A2	T/L	574	213	14	22 / 150	500/1100	15 / 10	7.00
	6	93A2	T/L	574	213	14	34 / 230	650/1430	15 / 10	7.00
23x10.50-12 SEG	4	90A2	T/L	579	264	14.4	20 / 140	600/1320	15 / 10	8.50
	6	100A3	T/L	579	264	14.4	32 / 220	800/1760	15 / 10	8.50

D405C



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (kgs / lbs)	Rim Width (Inch)
				od (mm)	sw (mm)					
26x12.00-12 SEG	4	100A3	T/L	648	307	18	20 / 140	800/1760	15 / 10	10.50
	6	104A3	T/L	648	307	18	34 / 230	900/1985	15 / 10	10.50



D407

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (kgs / lbs)	Rim Width (Inch)
				od (mm)	sw (mm)					
13x5.00-6	4	52A3	T/L	320	122	7.7	40 / 280	200/440	15 / 10	3.50
16x6.50-8	4	64A3	T/L	406	165	9.6	28 / 190	280/615	15 / 10	5.375

D408




Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (kgs / lbs)	Rim Width (Inch)
				od (mm)	sw (mm)					
26x12.00-12	8	117A3	T/L	648	307	19.5	48 / 330	1285/2835	15 / 10	10.50
	10	120A3	T/L	648	307	19.5	60 / 415	1400/3085	15 / 10	10.50

D413



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (kgs / lbs)	Rim Width (Inch)
				od (mm)	sw (mm)					
7-16	6	84A6	T/T	742	183	25.0	36 / 250	500/1100	30 / 20	6.00
8-16	6	91A6	T/T	790	211	26.8	28 / 190	615/1360	30 / 20	6.00
8-18	6	94A6	T/T	841	211	26.8	28 / 190	670/1480	30 / 20	6.00



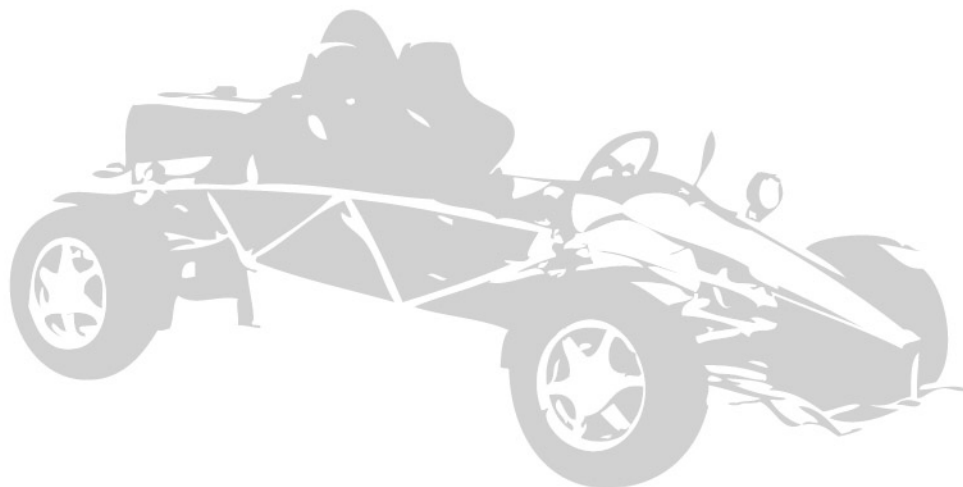

D190

Size	Ply Rating	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH / MPH	Rim Width (Inch)
			OD (mm)	SW (mm)					
11x7.10-5	4	T/L	271	210	40	14 / 96	95/210	180 / 112	8.00

D191

Size	Ply Rating	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH / MPH	Rim Width (Inch)
			OD (mm)	SW (mm)					
10x4.50-5	4	T/L	252	129	3.0	14 / 96	59/130	180 / 112	4.50
11x6.00-5	4	T/L	271	172	3.0	14 / 96	84/185	180 / 112	8.00





D258



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				OD (mm)	SW (mm)					
205/50-10	4	67A3	T/L	459	205	8.6	30 / 210	307/675	15 / 10	6.50



D270

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				OD (mm)	SW (mm)					
18x8.50-8	4	74A3	T/L	450	213	6.2	22 / 150	375/825	15 / 10	7.00

D271




Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				OD (mm)	SW (mm)					
19x8.00-10	4	- / A3	T/L	487	198	5.5	22 / 150	585/1290	15 / 10	6.00
165/60-10	6	- / A3	T/L	515	172	5.5	45 / 310	510/1125	15 / 10	6.00
190/50-12	4	- / A3	T/L	498	181	5.5	26 / 180	395/870	15 / 10	6.00



WHEEL BARROW

OFF THE ROAD

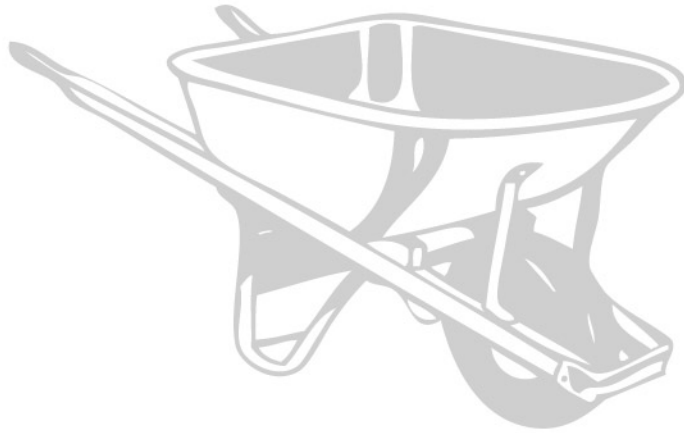

D601

Size	Ply Rating	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
			oo (mm)	sw (mm)					
400-6	2	T/T	345	101	3.1	30 / 205	177/390	25 / 16	238
400-6	4	T/T	345	101	3.1	50 / 345	304/670	25 / 16	238
400-6	2	T/L	345	101	3.1	30 / 205	177/390	25 / 16	238
400-6	4	T/L	345	101	3.1	50 / 345	304/670	25 / 16	238
350-8	2	T/T	373	86	2.4	30 / 205	145/320	25 / 16	250
350-8	4	T/T	373	86	2.4	50 / 345	195/430	25 / 16	250
350-8	2	T/L	373	86	2.4	30 / 205	145/320	25 / 16	250
350-8	4	T/L	373	86	2.4	50 / 345	195/430	25 / 16	250
480/400-8	2	T/T	406	101	2.4	30 / 205	197/435	25 / 16	250
480/400-8	4	T/T	406	101	2.4	50 / 345	304/670	25 / 16	250
480/400-8	2	T/L	406	101	2.4	30 / 205	197/435	25 / 16	250
480/400-8	4	T/L	406	101	2.4	50 / 345	304/670	25 / 16	250



D602



Size	Ply Rating	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
			oo (mm)	sw (mm)					
400-6	2	T/T	345	101	2.0	30 / 205	177/390	25 / 16	238
400-6	4	T/T	345	101	2.0	50 / 345	304/670	25 / 16	238
400-6	2	T/L	345	101	2.0	30 / 205	177/390	25 / 16	238
400-6	4	T/L	345	101	2.0	50 / 345	304/670	25 / 16	238
325/300-8	2	T/L	365	88	1.7	30 / 205	111/246	25 / 16	250
325/300-8	2	T/T	365	88	1.7	30 / 205	111/246	25 / 16	250
350-8	2	T/T	373	86	1.8	30 / 205	145/320	25 / 16	250
350-8	4	T/T	373	86	1.8	50 / 345	195/430	25 / 16	250
350-8	2	T/L	373	86	1.8	30 / 205	145/320	25 / 16	250
350-8	4	T/L	373	86	1.8	50 / 345	195/430	25 / 16	250
480/400-8	2	T/T	406	101	2.5	30 / 205	197/435	25 / 16	250
480/400-8	4	T/T	406	101	2.5	50 / 345	304/670	25 / 16	250
480/400-8	2	T/L	406	101	2.5	30 / 205	197/435	25 / 16	250
480/400-8	4	T/L	406	101	2.5	50 / 345	304/670	25 / 16	250



WHEEL BARROW



D304



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH / MPH	Rim Width (Inch)
				OD (mm)	SW (mm)					
27x8.50-15 EW	6	96B	T/L	678	213	13.0	45 / 310	710/1570	50 / 30	7.00
	8	101B	T/L	678	213	13.0	60 / 415	825/1820	50 / 30	7.00
27x10.50-15 EW	6	98B	T/L	691	259	13.0	45 / 310	750/1650	50 / 30	8.50
	8	103B	T/L	691	259	13.0	60 / 415	875/1930	50 / 30	8.50
10-16.5 EW	8	-/A2	T/L	773	264	12.7	60 / 415	1880/4140	10 / 5	8.25
	10	-/A2	T/L	773	264	12.7	75 / 520	2135/4710	10 / 5	8.25
12-16.5 EW	10	-/A2	T/L	831	307	16.6	65 / 450	2540/5600	10 / 5	9.75
	12	-/A2	T/L	831	307	16.6	80 / 550	2865/6320	10 / 5	9.75
14-17.5 EW	14	-/A2	T/L	921	349	18.2	80 / 550	3875/8540	10 / 5	10.50
15-19.5 EW	14	-/A2	T/L	1019	389	18.2	70 / 485	4565/10060	10 / 5	11.75



D305

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH / MPH	Rim Width (Inch)
				OD (mm)	SW (mm)					
10-16.5 EG	6	-/A2	T/L	773	264	16.6	45 / 310	1590/3500	10 / 5	8.25
	8	-/A2	T/L	773	264	16.6	60 / 410	1880/4140	10 / 5	8.25
12-16.5 EG	8	-/A2	T/L	831	307	17.0	50 / 340	2180/4810	10 / 5	9.75
	10	-/A2	T/L	831	307	17.0	65 / 450	2540/5600	10 / 5	9.75

D316




Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH / MPH	Rim Width (Inch)
				OD (mm)	SW (mm)					
31x15.50-15	10	121/B	T/L	792	391	17.0	60 / 410	1450/3200	50 / 30	13.00



SKID STEER

INDUSTRIAL IMPLEMENT

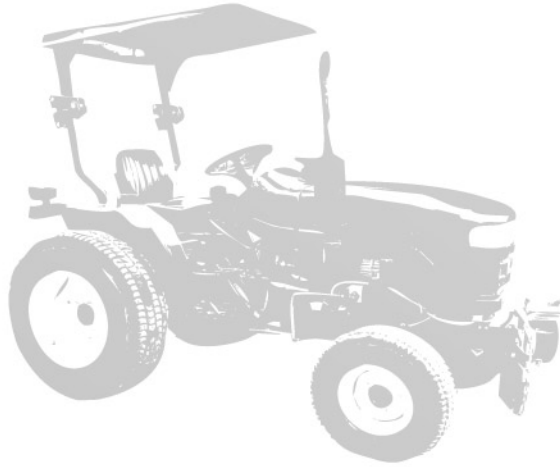

D256

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				oo (mm)	sw (mm)					
4.10/3.50-4	2		T/L	268	102	4.5	40 / 280	115/250	15 / 10	3.25
	2		T/T	268	102	4.5	40 / 280	115/250	15 / 10	3.25
	4		T/L	268	102	4.5	85 / 590	175/390	15 / 10	3.25
	4		T/T	268	102	4.5	85 / 590	175/390	15 / 10	3.25
4.80/4.00-8	2		T/L	423	108	5.2	35 / 240	230/510	15 / 10	2.50
	4		T/L	423	108	5.2	70 / 480	345/765	15 / 10	2.50
	6		T/L	423	108	5.2	105 / 720	440/970	15 / 10	2.50



D257



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				oo (mm)	sw (mm)					
3.00-4	2		T/T	256	84	2.8	30 / 205	103/227	15 / 10	2.25
	4		T/L	256	84	2.8	50 / 345	200/440	15 / 10	2.25
	4		T/T	256	84	2.8	50 / 345	200/440	15 / 10	2.25
	6		T/T	256	84	2.8	70 / 480	280/617	15 / 10	2.25

D289

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				oo (mm)	sw (mm)					
4.10/3.50-4	2		T/L	268	102	3.3	40 / 280	115/250	15 / 10	3.25
	2		T/T	268	102	3.3	40 / 280	115/250	15 / 10	3.25
	4		T/L	268	102	3.3	85 / 590	175/390	15 / 10	3.25
	4		T/T	268	102	3.3	85 / 590	175/390	15 / 10	3.25
4.80/4.00-8	2		T/L	423	108	4.1	35 / 240	230/510	15 / 10	2.50
	4		T/L	423	108	4.1	70 / 480	345/765	15 / 10	2.50





D603



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH / MPH	Rim Width (Inch)
				oo (mm)	sw (mm)					
250-4	2		T/L	216	61	2.8	30 / 205	67/147	15 / 10	1.50
			T/T	216	61	2.8	30 / 205	67/147	15 / 10	1.50
	4	T/L	216	61	2.8	50 / 345	100/220	15 / 10	1.50	
		T/T	216	61	2.8	50 / 345	100/220	15 / 10	1.50	
300-4	2		T/L	256	84	3.3	30 / 205	103/227	15 / 10	2.25
			T/T	256	84	3.3	30 / 205	103/227	15 / 10	2.25
	4	T/L	256	84	3.3	50 / 345	200/440	15 / 10	2.25	
		T/T	256	84	3.3	50 / 345	200/440	15 / 10	2.25	

D604



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH / MPH	Rim Width (Inch)
				oo (mm)	sw (mm)					
4.10/350-5	2		T/T	294	102	4.9	40 / 280	130/285	15 / 10	3.25
	4		T/T	294	102	4.9	85 / 590	200/445	15 / 10	3.25

D605



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH / MPH	Rim Width (Inch)
				oo (mm)	sw (mm)					
4.10/350-6	2		T/T	319	102	1.6	40 / 280	145/320	15 / 10	3.25
	4		T/T	319	102	1.6	85 / 590	225/495	15 / 10	3.25



LAWN & GARDEN

D265



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				co (mm)	sw (mm)					
400-4	2	29A3	T/T	265	100	3.9	24 / 170	103/225	15 / 10	3.50
	4	43A3	T/T	265	100	3.9	48 / 330	155/340	15 / 10	3.50
	6	51A3	T/T	265	100	3.9	60 / 410	195/430	15 / 10	3.50
410/3.50-4	2	29A3	T/L	268	102	3.5	24 / 170	103/225	15 / 10	3.25
	4	43A3	T/L	268	102	3.5	48 / 330	155/340	15 / 10	3.25
	2	29A3	T/T	268	102	3.5	24 / 170	103/225	15 / 10	3.25
11x4.00-4	4	43A3	T/T	268	102	3.5	48 / 330	155/340	15 / 10	3.25
	2	29A3	T/L	279	102	2.2	24 / 170	103/225	15 / 10	3.25
11x4.00-5	4	43A3	T/L	279	102	2.2	48 / 330	155/340	15 / 10	3.25
	2	26A3	T/L	272	104	2.5	22 / 150	95/210	15 / 10	3.00
13x5.00-6	4	42A3	T/L	272	104	2.5	46 / 320	150/330	15 / 10	3.00
	2	38A3	T/L	320	122	2.8	20 / 140	132/290	15 / 10	3.50
13x6.50-6	4	52A3	T/L	320	122	2.8	40 / 280	200/440	15 / 10	3.50
	2	41A3	T/L	330	163	3.0	14 / 100	145/320	15 / 10	5.00
15x6.00-6	4	55A3	T/L	330	163	3.0	28 / 190	218/480	15 / 10	5.00
	2	45A3	T/L	366	155	3.2	14 / 100	165/365	15 / 10	4.50
4.80x4.00-8	4	61A3	T/L	366	155	3.2	30 / 210	257/565	15 / 10	4.50
	4	66A3	T/T	423	121	5.0	40 / 280	300/660	15 / 10	3.75
16x6.50-8	6	78A3	T/T	423	121	5.0	52 / 360	425/935	15 / 10	3.75
	2	52A3	T/L	423	121	5.0	20 / 140	200/435	15 / 10	3.75
	4	66A3	T/L	423	121	5.0	40 / 280	300/660	15 / 10	3.75
16x7.50-8	6	78A3	T/L	423	121	5.0	52 / 360	425/935	15 / 10	3.75
	4	64A3	T/L	406	165	5.0	28 / 190	280/615	15 / 10	5.375
	2	55A3	T/L	411	188	3.8	12 / 80	218/480	15 / 10	5.375
18x6.50-8	4	69A3	T/L	411	188	3.8	24 / 170	325/715	15 / 10	5.375
	8	83A3	T/L	411	188	3.8	42 / 290	487/1070	15 / 10	5.375
	2	58A3	T/L	457	163	4.8	14 / 100	236/520	15 / 10	5.00
18x7.50-8	4	71A3	T/L	457	163	4.8	28 / 190	345/760	15 / 10	5.00
	2	59A3	T/L	457	191	3.6	12 / 80	243/535	15 / 10	6.00
18x8.50-8	4	73A3	T/L	457	191	3.6	24 / 170	365/805	15 / 10	6.00
	2	58A3	T/L	450	213	5.7	10 / 70	236/520	15 / 10	7.00
	4	74A3	T/L	450	213	5.7	22 / 150	375/825	15 / 10	7.00
18x9.50-8	6	82A3	T/L	450	213	5.7	34 / 230	475/1050	15 / 10	7.00
	2	64A3	T/L	462	235	5.7	10 / 70	280/615	15 / 10	7.00
	4	78A3	T/L	462	235	5.7	20 / 140	425/935	15 / 10	7.00
20x8-8	2	63A3	T/L	508	204	4.5	10 / 70	272/600	15 / 10	6.50
	4	79A3	T/L	508	204	4.5	22 / 150	437/965	15 / 10	6.50
20x10.00-8	2	71A3	T/L	508	254	6.2	10 / 70	345/760	15 / 10	8.00
	4	87A3	T/L	508	254	6.2	22 / 150	545/1200	15 / 10	8.00
20x10.00-10	2	70A3	T/L	508	254	5.3	10 / 70	335/740	15 / 10	8.00
	4	86A3	T/L	508	254	5.3	22 / 150	530/1170	15 / 10	8.00
23x8.50-12	2	69A3	T/L	574	213	5.2	10 / 70	325/715	15 / 10	7.00
	4	84A3	T/L	574	213	5.2	22 / 150	500/1100	15 / 10	7.00
	6	93A3	T/L	574	213	5.2	34 / 230	650/1430	15 / 10	7.00
23x9.50-12	2	74A3	T/L	577	235	5.5	10 / 70	375/825	15 / 10	7.00
	4	88A3	T/L	577	235	5.5	22 / 150	560/1230	15 / 10	7.00
23x10.50-12	2	76A3	T/L	579	264	6.0	10 / 70	400/880	15 / 10	8.50
	4	90A3	T/L	579	264	6.0	20 / 140	600/1320	15 / 10	8.50
	6	100A3	T/L	579	264	6.0	32 / 220	800/1760	15 / 10	8.50
24x12.00-12	4	99A3	T/L	610	304	6.2	20 / 140	775/1710	15 / 10	9.50
	2	87A3	T/L	648	307	6.7	10 / 70	545/1200	15 / 10	10.50
	4	100A3	T/L	648	307	6.7	20 / 140	800/1760	15 / 10	10.50
	6	109A3	T/L	648	307	6.7	30 / 210	1030/2270	15 / 10	10.50

LAWN & GARDEN





D265T

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				OD (mm)	SW (mm)					
16x6.50-8	2	49A3	T/L	406	165	28	14 / 100	185/410	15 / 10	5.375

D266

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				OD (mm)	SW (mm)					
11x4.00-5	2	26A3	T/L	272	104	2.5	22 / 150	95/210	15 / 10	3.00
	4	42A3	T/L	272	104	2.5	46 / 320	150/330	15 / 10	3.00
15x6.00-6	4	61A3	T/L	366	155	3.2	30 / 210	257/565	15 / 10	4.50
16x6.50-8	4	64A3	T/L	406	165	3.7	28 / 190	280/615	15 / 10	5.375
18x7.50-8	4	73A3	T/L	457	191	4.8	24 / 170	365/805	15 / 10	6.00
18x8.50-8	2	58A3	T/L	450	213	4.3	10 / 70	236/520	15 / 10	7.00
	4	74A3	T/L	450	213	4.3	22 / 150	375/825	15 / 10	7.00
18x9.50-8	4	78A3	T/L	462	235	6.2	20 / 140	425/935	15 / 10	7.00
20x10.00-8	4	87A3	T/L	508	254	6.2	22 / 150	545/1200	15 / 10	8.00
20x10.00-10	4	86A3	T/L	508	254	6.2	22 / 150	530/1170	15 / 10	8.00
	6	89A3	T/L	508	254	6.2	34 / 230	580/1280	15 / 10	8.00
23.10.50-12	4	90A3	T/L	579	264	5.0	20 / 140	600/1320	15 / 10	8.50
	6	100A3	T/L	579	264	5.0	32 / 220	800/1760	15 / 10	8.50



D267

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				OD (mm)	SW (mm)					
22x11.00-8	4	94A3	T/L	559	276	5.7	22 / 150	670/1480	15 / 10	8.50


D837

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				OD (mm)	SW (mm)					
11x4.00-4	2	29A3	T/L	279	102	2.2	24 / 170	103/225	15 / 10	3.25
	4	43A3	T/L	279	102	2.2	48 / 330	155/340	15 / 10	3.25
11x4.00-5	2	26A3	T/L	272	104	2.5	22 / 150	95/210	15 / 10	3.00
	4	42A3	T/L	272	104	2.5	46 / 320	150/330	15 / 10	3.00
13x5.00-6	2	38A3	T/L	320	122	2.8	20 / 140	132/290	15 / 10	3.50
	4	52A3	T/L	320	122	2.8	40 / 280	200/440	15 / 10	3.50
13x6.50-6	2	41A3	T/L	330	163	3.0	14 / 100	145/320	15 / 10	5.00
	4	55A3	T/L	330	163	3.0	28 / 190	218/480	15 / 10	5.00
15x6.00-6	2	45A3	T/L	366	155	3.2	14 / 100	165/365	15 / 10	4.50
	4	61A3	T/L	366	155	3.2	30 / 210	257/565	15 / 10	4.50
	6	75A3	T/L	366	155	3.2	42 / 290	387/855	15 / 10	4.50
16x6.50-8	2	49A3	T/L	406	165	3.7	14 / 100	185/410	15 / 10	5.375
	4	64A3	T/L	406	165	3.7	28 / 190	280/615	15 / 10	5.375
18x8.50-8	2	58A3	T/L	450	213	4.3	10 / 70	236/520	15 / 10	7.00
	4	74A3	T/L	450	213	4.3	22 / 150	375/825	15 / 10	7.00



LAWN & GARDEN



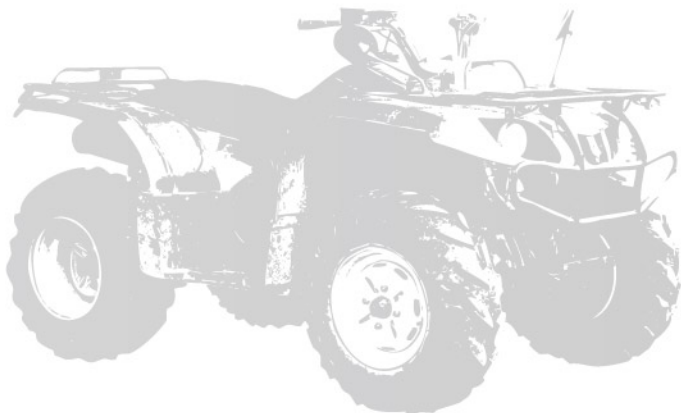

D010

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				oo (mm)	sw (mm)					
21x7.00-10	2	18F	T/L	533	177	12.1	4 / 25	75/165	80 / 50	5.50
	4	25F	T/L	533	177	12.1	5 / 35	925/205	80 / 50	5.50



D070

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				oo (mm)	sw (mm)					
20x12.00-9	2	35F	T/L	508	304	15.3	4 / 25	121/265	80 / 50	9.50
	4	42F	T/L	508	304	15.3	5 / 35	150/330	80 / 50	9.50

D928


Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				oo (mm)	sw (mm)					
22x11.00-8	2	36F	T/L	559	281	13.5	4 / 25	125/275	80 / 50	9.00
	4	43F	T/L	559	281	13.5	5 / 35	155/340	80 / 50	9.00
	6	48F	T/L	559	281	13.5	7 / 45	180/395	80 / 50	9.00



D929

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				oo (mm)	sw (mm)					
16x8.00-7	2	9F	T/L	406	204	9.5	4 / 25	58/128	80 / 50	6.50
	4	16F	T/L	406	204	9.5	5 / 35	71/157	80 / 50	6.50
20x7.00-8	2	16F	T/L	508	177	9.5	4 / 25	71/157	80 / 50	5.50
	4	23F	T/L	508	177	9.5	5 / 35	87.5/195	80 / 50	5.50
22x11.00-8	2	36F	T/L	559	281	11.9	4 / 25	125/275	80 / 50	9.00
	4	43F	T/L	559	281	11.9	5 / 35	155/340	80 / 50	9.00
25x12.00-9	2	44F	T/L	635	304	13.5	4 / 25	160/355	80 / 50	9.50
	4	51F	T/L	635	304	13.5	5 / 35	195/430	80 / 50	9.50



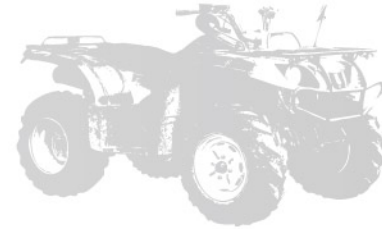

D930



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH / MPH	Rim Width (Inch)
				OD (mm)	SW (mm)					
16x6.50-8	2	5F	T/L	406	166	9.6	4 / 25	51.5/114	80 / 50	5.50
	4	12F	T/L	406	166	9.6	5 / 35	63/139	80 / 50	5.50
	6	17F	T/L	406	166	9.6	7 / 45	73/161	80 / 50	5.50
22x11.00-8	2	36F	T/L	559	281	12.4	4 / 25	125/275	80 / 50	9.00
	4	43F	T/L	559	281	12.4	5 / 35	155/340	80 / 50	9.00
22x11.00-9	2	36F	T/L	559	281	12.4	4 / 25	125/275	80 / 50	9.00
	4	43F	T/L	559	281	12.4	5 / 35	155/340	80 / 50	9.00
25x12.00-9	2	44F	T/L	635	304	13.4	4 / 25	160/355	80 / 50	9.50
	4	51F	T/L	635	304	13.4	5 / 35	195/430	80 / 50	9.50
22x11.00-10	2	35F	T/L	559	281	12.4	4 / 25	121/265	80 / 50	9.00
	4	42F	T/L	559	281	12.4	5 / 35	150/330	80 / 50	9.00
24x11.00-10	2	40F	T/L	610	281	13.4	4 / 25	140/310	80 / 50	9.00
	4	47F	T/L	610	281	13.4	5 / 35	175/385	80 / 50	9.00
25x12.00-10	2	44F	T/L	635	304	13.4	4 / 25	160/355	80 / 50	9.50
	4	51F	T/L	635	304	13.4	5 / 35	195/430	80 / 50	9.50
23x8.00-11	2	26F	T/L	584	204	12.4	4 / 25	95/210	80 / 50	6.50
	4	33F	T/L	584	204	12.4	5 / 35	115/255	80 / 50	6.50
24x9.00-11	2	33F	T/L	610	227	12.4	4 / 25	115/255	80 / 50	7.00
	4	40F	T/L	610	227	12.4	5 / 35	140/310	80 / 50	7.00
24x10.00-11	2	36F	T/L	610	254	12.4	4 / 25	125/275	80 / 50	8.00
	4	43F	T/L	610	254	12.4	5 / 35	155/340	80 / 50	8.00
25x8.00-12	2	31F	T/L	635	204	14.4	4 / 25	109/240	80 / 50	6.50
	4	38F	T/L	635	204	14.4	5 / 35	132/290	80 / 50	6.50
25x10.00-12	2	38F	T/L	635	254	14.4	4 / 25	132/290	80 / 50	8.00
	4	45F	T/L	635	254	14.4	5 / 35	165/365	80 / 50	8.00


D932

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH / MPH	Rim Width (Inch)
				OD (mm)	SW (mm)					
22x11.00-9	6	48F	T/L	559	281	21.1	7 / 45	180/395	80 / 50	9.00
25x12.00-9	6	56F	T/L	635	304	21.1	7 / 45	224/495	80 / 50	9.50
22x11.00-10	6	47F	T/L	559	281	21.1	7 / 45	175/385	80 / 50	9.00
24x11.00-10	6	52F	T/L	610	281	21.1	7 / 45	200/440	80 / 50	9.00
25x12.00-10	6	56F	T/L	635	304	21.1	7 / 45	224/495	80 / 50	9.50
25x8-12	6	43F	T/L	635	204	21.1	7 / 45	155/340	80 / 50	6.50
25x10-12	6	50F	T/L	635	254	21.1	7 / 45	190/420	80 / 50	8.00
26x10.00-12	6	52F	T/L	660	254	24.9	7 / 45	200/440	80 / 50	8.00
26x12.00-12	6	58F	T/L	660	304	24.9	7 / 45	236/520	80 / 50	9.50
27x10.00-12	6	56F	T/L	686	254	24.9	7 / 45	224/495	80 / 50	8.00
27x12.00-12	6	60F	T/L	686	304	24.9	7 / 45	250/550	80 / 50	9.50
28x10.00-12	6	57F	T/L	711	254	24.9	7 / 45	230/505	80 / 50	8.00
28x12.00-12	6	61F	T/L	711	304	24.9	7 / 45	257/565	80 / 50	9.50



ATV



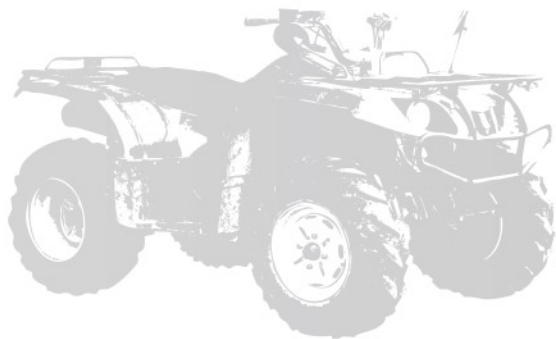

D933

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				oo (mm)	sw (mm)					
23x8-11	4	33F	T/L	584	204	14.4	5 / 35	115/255	80 / 50	6.50
	6	38F	T/L	584	204	14.4	7 / 45	132/290	80 / 50	6.50
24x9-11	4	40F	T/L	610	227	15.3	5 / 35	140/310	80 / 50	7.00
	6	45F	T/L	610	227	15.3	7 / 45	165/365	80 / 50	7.00
25x8-12	4	38F	T/L	635	204	15.3	5 / 35	132/290	80 / 50	6.50
	6	43F	T/L	635	204	15.3	7 / 45	155/340	80 / 50	6.50
25x10-12	4	45F	T/L	635	254	15.3	5 / 35	165/365	80 / 50	8.00
	6	50F	T/L	635	254	15.3	7 / 45	190/420	80 / 50	8.00




D936



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				oo (mm)	sw (mm)					
22x11.00-8	6	48F	T/L	559	281	15.3	7 / 45	180/395	80 / 50	9.00
22x11.00-9	6	48F	T/L	559	281	15.3	7 / 45	180/395	80 / 50	9.00
25x12.00-9	6	56F	T/L	635	304	15.3	7 / 45	224/495	80 / 50	9.50
22x8.00-10	6	36F	T/L	559	204	15.3	7 / 45	125/275	80 / 50	6.50
22x11.00-10	6	47F	T/L	559	281	15.3	7 / 45	175/385	80 / 50	9.00
23x8.00-10	6	39F	T/L	584	204	14.4	7 / 45	136/300	80 / 50	6.50
23x10.00-10	6	46F	T/L	584	254	14.4	7 / 45	170/375	80 / 50	8.00
24x11.00-10	6	52F	T/L	610	281	15.3	7 / 45	200/440	80 / 50	9.00
25x12.00-10	6	56F	T/L	635	304	15.3	7 / 45	224/495	80 / 50	9.50
27x12.00-10	6	60F	T/L	686	304	28.8	7 / 45	250/550	80 / 50	9.50
23x8.00-11	6	38F	T/L	584	204	15.3	7 / 45	132/290	80 / 50	6.50
24x8.00-11	6	41F	T/L	610	204	14.4	7 / 45	145/320	80 / 50	6.50
24x9.00-11	6	45F	T/L	610	227	15.3	7 / 45	165/265	80 / 50	7.00
24x10.00-11	6	48F	T/L	610	254	14.4	7 / 45	180/385	80 / 50	8.00
25x8.00-11	6	44F	T/L	635	204	15.3	7 / 45	160/355	80 / 50	6.50
25x10.00-11	6	51F	T/L	635	254	15.3	7 / 45	195/430	80 / 50	8.00
25x8.00-12	6	43F	T/L	635	204	15.3	7 / 45	155/340	80 / 50	6.50
25x10.00-12	6	50F	T/L	635	254	15.3	7 / 45	190/420	80 / 50	8.00
26x10.00-12	6	52F	T/L	660	254	28.8	7 / 45	200/440	80 / 50	8.00
26x12.00-12	6	58F	T/L	660	304	28.8	7 / 45	235/520	80 / 50	9.50
27x10.00-12	6	54F	T/L	686	254	28.8	7 / 45	212/467	80 / 50	8.00
27x12.00-12	6	60F	T/L	686	304	28.8	7 / 45	250/550	80 / 50	9.50
28x10.00-12	6	56F	T/L	711	254	28.8	7 / 45	224/495	80 / 50	8.00
28x12.00-12	6	63F	T/L	711	304	28.8	7 / 45	272/599	80 / 50	8.00



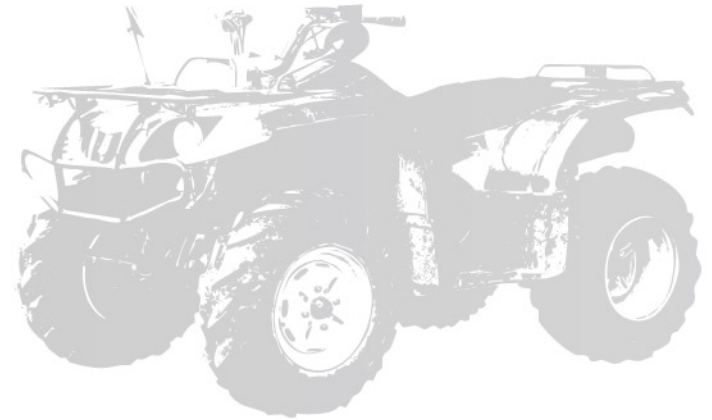

D985

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				od (mm)	sw (mm)					
22.5x12.00-9	6	52F	T/L	572	304	24.3	7 / 45	200/240	80 / 50	9.50
25x9.00-12	6	47F	T/L	635	227	24.3	7 / 45	175/385	80 / 50	7.00
25x11.00-12	6	53F	T/L	635	281	24.3	7 / 45	206/455	80 / 50	9.00
26x9.50-12	6	50F	T/L	660	241	24.3	7 / 45	190/420	80 / 50	8.00
26x12.00-12	6	58F	T/L	660	304	24.3	7 / 45	236/520	80 / 50	9.50
27x9.50-12	6	53F	T/L	686	241	24.3	7 / 45	206/455	80 / 50	8.00
27x12.00-12	6	60F	T/L	686	304	24.3	7 / 45	250/550	80 / 50	9.50
28x9.50-12	6	55F	T/L	711	241	24.3	7 / 45	218/480	80 / 50	8.00
28x12.00-12	6	63F	T/L	711	304	24.3	7 / 45	272/599	80 / 50	9.50

DSP-1



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				od (mm)	sw (mm)					
22x10.00-9	2	32F	T/L	559	254	13.4	4 / 25	112/245	80 / 50	8.00
	4	39F	T/L	559	254	13.4	5 / 35	136/300	80 / 50	8.00



DSP-2

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load (kgs / lbs)	Max. Speed (KPH / MPH)	Rim Width (Inch)
				od (mm)	sw (mm)					
22x10.00-9	2	32F	T/L	559	254	13.4	4 / 25	112/245	80 / 50	8.00
	4	39F	T/L	559	254	13.4	5 / 35	136/300	80 / 50	8.00



FORKLIFT



D301



Size	Ply Rating	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load(Load Wheel) kgs / lbs	Max. Load(Steer Wheel) kgs / lbs	Max. Speed(Load Wheel) KPH / MPH	Max. Speed (Steer Wheel) KPH / MPH	Rim Width (Inch)
			OD (mm)	SW (mm)							
5.00-8 ET890	8	T/T	469	131	12.7	115/790	-	830/1830	25/15	25/15	3.00
18x7-8	16	T/T	465	168	13.4	145/1000	-	1640/3615	25/15	25/15	4.33
21x8-9	14	T/T	533	203	18.4	145/1000	2115/4660	1785/3940	25/15	25/15	6.00
6.90/6.00-9 ET890	10	T/T	545	160	14.2	125/860	1515/3340	1280/2820	25/15	25/15	4.00
6.50-10 ET890	10	T/T	597	178	15.8	115/790	1725/3805	1455/3210	25/15	25/15	5.00
7.50-10 ET890	12	T/T	647	203	18.2	120/830	2310/5090	1950/4300	25/15	25/15	5.50
7.00-12 ET890	12	T/T	683	192	18.2	125/860	2445/5395	2065/4555	25/15	25/15	5.00
	14	T/T	683	192	18.2	145/1000	2670/5885	2255/4970	25/15	25/15	5.00
250-15 ET890	18	T/T	735	250	19.5	150/1030	4105/9050	3470/7650	25/15	25/15	7.50
300-15 ET890	20	T/T	840	300	20.7	135/930	5940/13100	4990/11000	25/15	25/15	8.00
7.00-15 ET890	12	T/T	762	203	18.2	125/860	2835/6245	2395/5275	25/15	25/15	6.00
7.00L-15 ET890	12	T/T	731	199	18.2	125/860	2805/6185	2370/5220	25/15	25/15	5.50
7.50-15 [30"] ET890	12	T/T	762	203	18.2	125/860	2835/6245	2395/5275	25/15	25/15	6.00
	14	T/T	762	203	18.2	140/970	3505/7725	2965/6535	25/15	25/15	6.00
7.50-15 [32"] ET890	12	T/T	808	215	18.2	115/790	3140/6920	2650/5845	25/15	25/15	6.00
8.15-15 ET890	12	T/T	706	221	19.8	120/830	2810/6190	2370/5230	25/15	25/15	7.00
	14	T/T	706	221	19.8	140/970	3075/6775	2595/5720	25/15	25/15	7.00
8.25-15 ET890	12	T/T	847	236	18.2	105/720	3545/7810	2990/6595	25/15	25/15	6.50
	14	T/T	847	236	18.2	120/830	3830/8445	3235/7135	25/15	25/15	6.50
	16	T/T	847	236	18.2	135/930	4210/9280	3550/7825	25/15	25/15	6.50

D306



Size	Ply Rating	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load(Load Wheel) kgs / lbs	Max. Load(Steer Wheel) kgs / lbs	Max. Speed(Load Wheel) KPH / MPH	Max. Speed (Steer Wheel) KPH / MPH	Rim Width (Inch)
			OD (mm)	SW (mm)							
5.00-8 RIM GUARD	8	T/T	469	131	12.9	115/790	-	830/1830	25/15	25/15	3.00
5.00-8 SOLID		Solid	468	146	23.0	-	-	950/2100	-	15/10	3.25A
6.00-9 RIM GUARD	10	T/T	545	160	15.0	125/860	1515/3340	1280/2820	25/15	25/15	4.00
6.00-9 SOLID		Solid	545	175	24.0	-	1920/4230	1390/3065	10/6	15/10	4.00E
6.50-10 RIM GUARD	12	T/T	597	178	15.3	140/970	1935/4260	1635/3600	25/15	25/15	5.00
6.50-10 SOLID		Solid	596	177	26.8	-	2635/5810	1910/4210	10/6	15/10	5.00F
7.00-12 RIM GUARD	14	T/T	683	192	15.5	145/1000	2670/5885	2255/4970	25/15	25/15	5.00
7.00-12 SOLID		Solid	682	192	26.8	-	3010/6640	2180/4810	10/6	15/10	5.00S
7.00-15 RIM GUARD	14	T/T	762	203	15.4	145/1000	3090/6810	2610/5755	25/15	25/15	6.00
7.50-15 RIM GUARD	14	T/T	808	215	16.0	140/970	3505/7725	2965/6535	25/15	25/15	6.00
8.15-15	12	T/T	706	221	15.5	120/830	2810/6190	2370/5230	25/15	25/15	7.00
8.15-15 RIM GUARD	14	T/T	706	221	15.5	140/970	3075/6775	2595/5720	25/15	25/15	7.00
8.25-15	12	T/T	847	236	15.5	105/720	3545/7810	2990/6595	25/15	25/15	6.50
8.25-15 RIM GUARD	14	T/T	847	236	15.5	120/830	3830/8445	3235/7135	25/15	25/15	6.50





D307



Size	Ply Rating	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load(Load Wheel) kgs / lbs	Max. Load(Steer Wheel) kgs / lbs	Max. Speed(Load Wheel) KPH / MPH	Max. Speed (Steer Wheel) KPH / MPH	Rim Width (Inch)
			OD (mm)	SW (mm)							
5.00-8 SOLID		Solid	468	146	17.4	-	-	950/2100	-	15/10	3.25A
6.00-9 SOLID		Solid	545	175	19.0	-	1920/4230	1390/3065	10/6	15/10	4.00E
6.50-10 SOLID		Solid	596	177	21.4	-	2635/5810	1910/4210	10/6	15/10	5.00F
7.00-12 SOLID		Solid	682	192	21.4	-	3010/6640	2180/4810	10/6	15/10	5.00S
28x9-15 SOLID		Solid	706	220	23.8	-	3795/8360	2750/6055	10/6	15/10	6.50




D308

Size	Ply Rating	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load(Load Wheel) kgs / lbs	Max. Load(Steer Wheel) kgs / lbs	Max. Speed(Load Wheel) KPH / MPH	Max. Speed (Steer Wheel) KPH / MPH	Rim Width (Inch)
			OD (mm)	SW (mm)							
4.00-8 SOLID		Solid	422	120	18.7	-	-	765/1685	-	15/10	3.00D



DUMPER

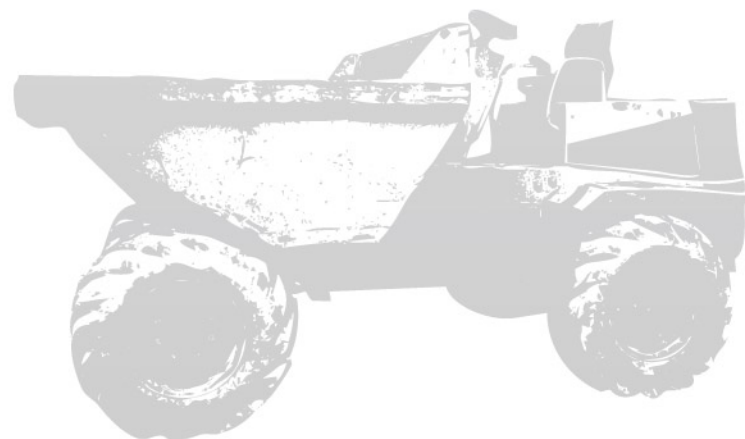

D203

Size	Ply Rating	Load Index		Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs		Max. Speed KPH / MPH	Rim Width (Inch)
		Free Rolling Wheels	Drive Wheels		OD (mm)	SW (mm)			Free Rolling Wheels	Drive Wheels		
11.00-20	18	-	170	T/T	1104	293	20.3	145/1000	-	6000/13225	25/15	8.00

D302

Size	Ply Rating	Load Index		Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs		Max. Speed KPH / MPH	Rim Width (Inch)
		Free Rolling Wheels	Drive Wheels		OD (mm)	SW (mm)			Free Rolling Wheels	Drive Wheels		
10.5/80-18	10	131	119	T/T	885	274	21.5	53/370	1950/4300	1360/3000	40/25	9.00
	10	131	119	T/L	885	274	21.5	53/370	1950/4300	1360/3000	40/25	9.00
12.5/80-18	12	142	129	T/T	965	308	21.5	53/370	2650/5840	1850/4080	40/25	9.00
	12	142	129	T/L	965	308	21.5	53/370	2650/5840	1850/4080	40/25	9.00
	16	148	135	T/L	965	308	24.5	71/490	3150/6940	2180/4805	40/25	9.00




D303A

Size	Ply Rating	Load Index		Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs		Max. Speed KPH / MPH	Rim Width (Inch)
		Free Rolling Wheels	Drive Wheels		OD (mm)	SW (mm)			Free Rolling Wheels	Drive Wheels		
15.0/55-17 T/S [380/55-17]	10	134	122	T/L	850	391	24.9	38/260	2120/4670	1500/3305	40/25	13.00
15.0/55-17 T/S [380/55-17]	12	138	125	T/L	850	391	24.9	40/280	2360/5200	1650/3635	40/25	13.00
10.5/80-18 EG	10	123	119	T/L	885	274	22.0	53/370	1950/4300	1360/3000	40/25	9.00
12.5/80-18 EG	12	142	129	T/T	965	308	26.8	53/370	2650/5840	1850/4080	40/25	9.00
	12	142	129	T/L	965	308	26.8	53/370	2650/5840	1850/4080	40/25	9.00
405/70-24	14	-	152	T/L	1176	418	33.6	70/480	-	3550/7825	40/25	14.00



DUMPER



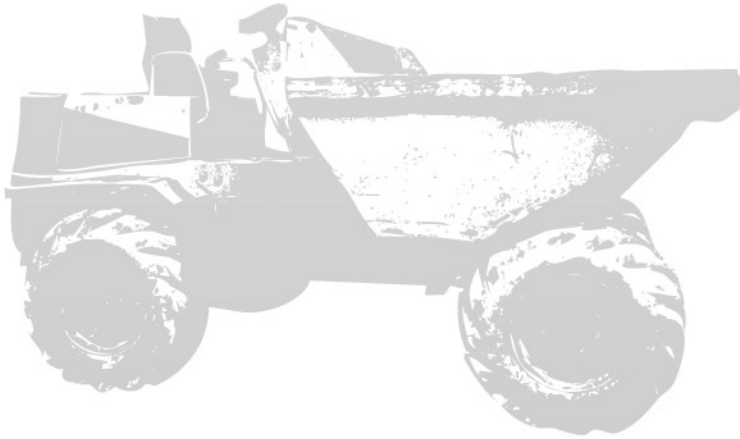

D303B



Size	Ply Rating	Load Index		Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs		Max. Speed KPH / MPH	Rim Width (Inch)
		Free Rolling Wheels	Drive Wheels		co (mm)	sw (mm)			Free Rolling Wheels	Drive Wheels		
16.0/70-20 EG(405/70-20)	14	154	142	T/L	1075	418	30.1	51/350	3750/8265	2650/5840	40/25	14.00



D309

Size	Ply Rating	Load Index		Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs		Max. Speed KPH / MPH	Rim Width (Inch)
		Free Rolling Wheels	Drive Wheels		co (mm)	sw (mm)			Free Rolling Wheels	Drive Wheels		
10.00-20	16	-	164	T/T	1075	278	15.3	130/900	-	5000/11020	25/15	7.50

D403

Size	Ply Rating	Load Index		Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs		Max. Speed KPH / MPH	Rim Width (Inch)
		Free Rolling Wheels	Drive Wheels		co (mm)	sw (mm)			Free Rolling Wheels	Drive Wheels		
10.0/75-15.3	8	119	106	T/T	760	264	20.1	45/310	1360/3000	950/2095	40/25	9.00
	8	119	106	T/L	760	264	20.1	45/310	1360/3000	950/2095	40/25	9.00
	10	123	111	T/L	760	264	20.1	56/390	1550/3415	1090/2400	40/25	9.00
11.5/80-15.3	8	126	114	T/T	845	290	22.0	39/270	1700/3745	1180/2600	40/25	9.00
	8	126	114	T/L	845	290	22.0	39/270	1700/3745	1180/2600	40/25	9.00
	10	131	119	T/L	845	290	22.0	49/340	1950/4300	1360/3000	40/25	9.00
405/70-20	14	154	142	T/L	1075	418	26.0	51/350	3750/8265	2650/5840	40/25	14.00



D410

Size	Ply Rating	Load Index		Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs		Max. Speed KPH / MPH	Rim Width (Inch)
		Free Rolling Wheels	Drive Wheels		co (mm)	sw (mm)			Free Rolling Wheels	Drive Wheels		
500/60-22.5 T1S	12	161	149	T/L	1172	503	26.8	32/220	4625/10195	3250/7165	40/25	16.00

DUMPER





D 313[E-3]



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH/MPH	Rim Width (Inch)
				co (mm)	sw (mm)					
15.5-25	12	149B	T/L	1278	394	25.3	36 / 250	3250/7150	50 / 30	1200
	12	153B	T/L	1348	445	29.1	33 / 225	3650/8050	50 / 30	1400
17.5-25	16	158B	T/L	1348	445	29.1	44 / 300	4250/9350	50 / 30	1400
	20	164B	T/L	1348	445	29.1	58/400	5000/11000	50 / 30	1400
20.5-25	20	170B	T/L	1493	521	31.8	47 / 325	6000/13200	50 / 30	1700
23.5-25	20	177B	T/L	1617	597	41.3	44 / 300	7300/16100	50 / 30	1950
26.5-25	28	188B	T/L	1750	673	38.4	51 / 350	10000/22000	50 / 30	2200
29.5-25	28	193B	T/L	1874	749	35.4	47 / 325	11500/25400	50 / 30	2500

D 319[E-3]

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH/MPH	Rim Width (Inch)
				co (mm)	sw (mm)					
23.5-25	20	177B	T/L	1617	597	36.1	44 / 300	7300/16100	50 / 30	1950



D 320[E-7]



Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH/MPH	Rim Width (Inch)
				co (mm)	sw (mm)					
20.5-25	20	170B	T/L	1493	521	15.8	47 / 325	6000/13200	50 / 30	1700



LOADER & DOZER

OFF THE ROAD

LOADER & DOZER



D318[L-2]

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH/MPH	Rim Width (Inch)
				OD (mm)	SW (mm)					
15.5-25	12	168A2	T/L	1278	394	24.3	58 / 400	5600/12300	10 / 5	12.00
17.5-25	12	171A2	T/L	1348	445	27.7	51 / 350	6150/13600	10 / 5	14.00
	16	177A2	T/L	1348	445	27.7	69 / 475	7300/16100	10 / 5	14.00
20.5-25	20	186A2	T/L	1493	521	32.1	65 / 450	9500/20900	10 / 5	17.00

GRADER

GRADER



D310[G-2]

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH/MPH	Rim Width (Inch)
				OD (mm)	SW (mm)					
13.00-24	12	143A8	T/T	1278	333	24	44 / 300	2725/6000	40 / 25	8.00 TG
	12	143A8	T/L	1278	333	24	44 / 300	2725/6000	40 / 25	8.00 TG
14.00-24	12	147A8	T/T	1348	362	27	36 / 250	3075/6800	40 / 25	8.00 TG
	16	153A8	T/T	1348	362	27	51 / 350	3650/8050	40 / 25	8.00 TG



COMPACTOR

COMPACTOR



DC-1

Size	Ply Rating	LI/SS	Type	Inflated Dimension		Tread Depth (mm)	Inflation Pressure (psi/kPa)	Max. Load kgs / lbs	Max. Speed KPH/MPH	Rim Width (Inch)
				OD (mm)	SW (mm)					
9.00-20	14	159A2	T/T	1016	259	-	105 / 725	4375/9650	10 / 5	7.00
11.00-20	16	167A2	T/T	1083	293	-	105 / 725	5450/12000	10 / 5	8.00





DEESTONE

DEESTONE LIMITED

84 Soi Sinprasog, Moo 7, Petchkasem Road, Oamnoi,
Krathumban, Samutsakorn 74130 Thailand

Tel : (+662) 420-0038, 810-2995

Fax : (+662) 420-0572, 810-3146-7

